


Product **DFM2595Z160IA**

Specification

Center Frequency[fo]	2595MHz
Bandwidth[BW]	± 80.0MHz
Insertion Loss in BW	2.9 dB max.
Ripple in BW	2.0 dB max.
VSWR in BW	1.5:1max.
Attenuation [Absolute Value]	65.0 min. @ DC~2300 MHz 55.0 min. @ 2300~2400 MHz 45.0 min. @ 2400~2470 MHz 42.0 min. @ 2470~2483.5 MHz 40.0 min. @ 2483.5~2500 MHz 25.0 min. @ 2695~2700 MHz 42.0 min. @ 2700~2740 MHz 60.0 min. @ 3300~4000 MHz
In/Out Impedance	50Ω
Input Power	2 w max.
Operation Temperature	-40°C ~ +85 °C

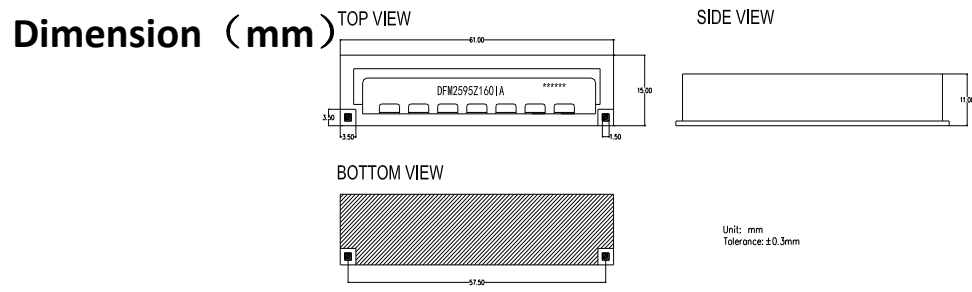

TEST GRAPH

