


Product **DFN2595S160DA**

Specification

Center Frequency[fo]	2595MHz
Bandwidth[BW]	±80.0MHz
Insertion Loss in BW	2.5 dB max.
Ripple in BW	2 dB max.
VSWR in BW	1.5:1max.
Attenuation [Absolute Value]	20.0 min. @ DC~1785 MHz 20.0 min. @ 1805~1990 MHz 15.0 min. @ 2010~2300 MHz 5.0 min. @ 2300~2483.5 MHz 5.0 min. @ 2483.5~2495 MHz 5.0 min. @ 2695~3300 MHz 10.0 min. @ 3300~3600 MHz 10.0 min. @ 3600~4900 MHz 15.0 min. @ 4900~5091 MHz 15.0 min. @ 5150~5350 MHz 15.0 min. @ 5725~5850 MHz
In/Out Impedance	50Ω
Input Power	1 w max.
Operation Temperature	-40°C ~ +85 °C

Dimension (mm)

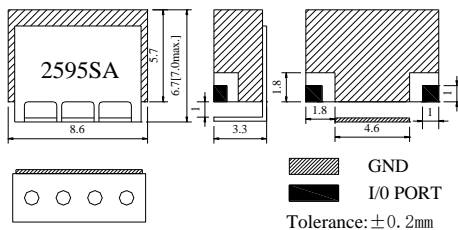

TEST GRAPH

