


Product

DFN2595W160EA

Specification

Center Frequency[fo]	2595MHz
Bandwidth[BW]	±80.0MHz
Insertion Loss in BW	2.5 dB max.
Ripple in BW	1.5 dB max.
VSWR in BW	1.5:1max.
Attenuation [Absolute Value]	45 min. @ 699~960 MHz 35 min. @ 960~1710 MHz 35 min. @ 1710~2300 MHz 55 min. @ 2300~2400 MHz 30 min. @ 2400~2473 MHz 17 min. @ 2473~2480 MHz 5 min. @ 2480~2495 MHz 5 min. @ 2710~2725 MHz 13 min. @ 2725~3800 MHz 20 min. @ 3800~4200 MHz
In/Out Impedance	50Ω
Input Power	2 w max.
Operation Temperature	-40°C ~ +85 °C

Dimension (mm)

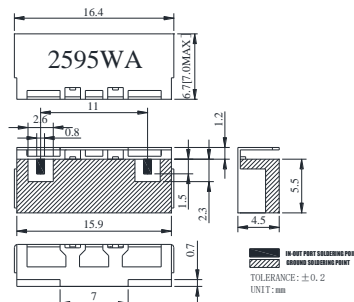

TEST GRAPH

