


Product **DFM2595W160GG**

Specification

Center Frequency[fo]	2595MHz	
Bandwidth[BW]	± 80.0MHz	
Insertion Loss in BW	2.5 dB max.	
Ripple in BW	1.5 dB max.	
VSWR in BW	1.5:1max.	
Attenuation [Absolute Value]	40 min. @ 0~2400 MHz 12 min. @ 2483.5~2495 MHz 20 min. @ 2715~2780 MHz 20 min. @ 5850~12750 MHz	30 min. @ 2400~2483.5 MHz 12 min. @ 2695~2715 MHz 30 min. @ 2780~5850 MHz
In/Out Impedance	50Ω	
Input Power	3 w max.	
Operation Temperature	-40°C ~ +85 °C	

Dimension (mm)

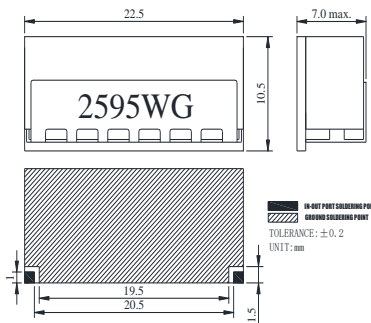

TEST GRAPH

