


Product**DFM3650W300GA**

Specification

Center Frequency[fo]	3650MHz
Bandwidth[BW]	± 150.0MHz
Insertion Loss in BW	2.3 dB max.
Ripple in BW	1.0 dB max.
VSWR in BW	1.6:1max.
Attenuation [Absolute Value]	45 min. @ 1~2690 MHz 30 min. @ 2690~3400 MHz 20 min. @ 3400~3440 MHz 5 min. @ 3440~3460 MHz 5 min. @ 3840~3860 MHz 20 min. @ 3860~4200 MHz 25 min. @ 4200~4900 MHz 30 min. @ 4900~5150 MHz 25 min. @ 5150~5925 MHz 20 min. @ 5925~6600 MHz 10 min. @ 6600~19000 MHz
In/Out Impedance	50Ω
Input Power	3 w max.
Operation Temperature	-40°C ~ +95 °C

Dimension (mm)

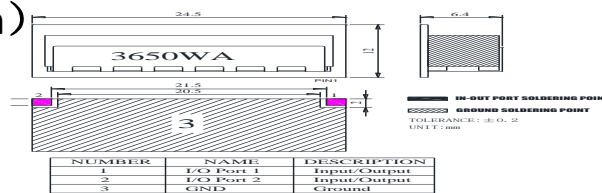

TEST GRAPH

