


Product **DFM3450W300GC**

Specification

Center Frequency[fo]	3450MHz
Bandwidth[BW]	± 150.0 MHz
Insertion Loss in BW	2.0 dB max.
Ripple in BW	1.2 dB max.
VSWR in BW	1.5:1max.
Attenuation [Absolute Value]	50.0 min. @ 0~2700 MHz 30.0 min. @ 2700~3200 MHz 15.0 min. @ 3200~3240 MHz 15.0 min. @ 3660~3700 MHz 30.0 min. @ 3700~5925 MHz
In/Out Impedance	50 Ω
Input Power	4 w max.
Operation Temperature	-40 $^{\circ}$ C ~ +85 $^{\circ}$ C

Dimension (mm)

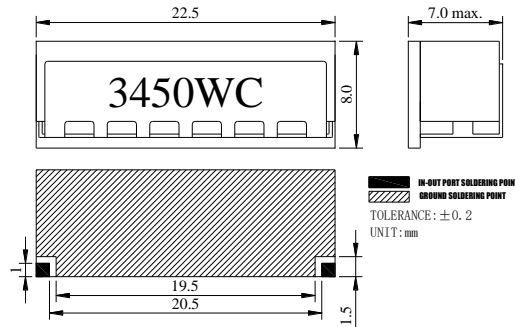

TEST GRAPH

