


Product**DFM4930W60GA**

Specification

Center Frequency[fo]	4930MHz
Bandwidth[BW]	± 30.0MHz
Insertion Loss in BW	3.2 dB max.
Ripple in BW	1.5 dB max.
VSWR in BW	1.5:1max.
Attenuation [Absolute Value]	40.0 min. @ 2400~2483.5 MHz 8.0 min. @ 2483.5~4880 MHz 8.0 min. @ 4980~5150 MHz
In/Out Impedance	50Ω
Input Power	3 w max.
Operation Temperature	-40°C ~ +85 °C

Dimension (mm)

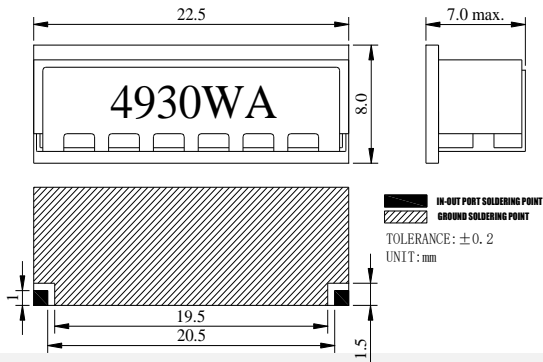

TEST GRAPH

