


Product

DFM4650W500GB

Specification

Center Frequency[fo]	4650MHz
Bandwidth[BW]	± 250.0MHz
Insertion Loss in BW	2.5 dB max.
Ripple in BW	1.5 dB max.
VSWR in BW	1.5:1max.
Attenuation [Absolute Value]	40.0 min. @ 2400~2483.5 MHz 10.0 min. @ 2483.5~4350 MHz 10.0 min. @ 4950~5150 MHz 20.0 min. @ 5150~5850 MHz
In/Out Impedance	50Ω
Input Power	3 w max.
Operation Temperature	-40°C ~ +85 °C

Dimension (mm)

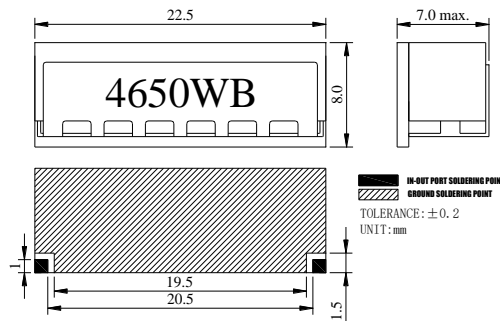

TEST GRAPH

