


Product **DFM3450W100FA**

Specification

Center Frequency[fo]	3450MHz
Bandwidth[BW]	±50.0MHz
Insertion Loss in BW	2.0 dB max.
Ripple in BW	1.5 dB max.
VSWR in BW	1.38:1max.
Attenuation [Absolute Value]	54.0 min. @ 0~2700 MHz 40.0 min. @ 2700~3295 MHz 40.0 min. @ 3605~5825 MHz 22.0 min. @ 5925~17000MHz
In/Out Impedance	50Ω
Input Power	3 w max.
Operation Temperature	-40°C ~ +85 °C

Dimension (mm)

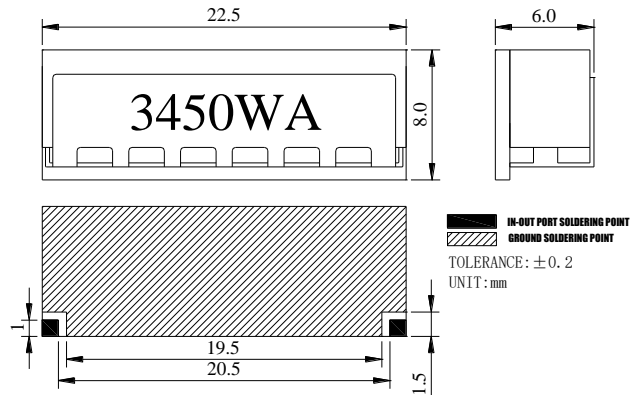

TEST GRAPH

