


**Product** **DFM3550W100FA**

**Specification**

<b>Center Frequency[fo]</b>	3550MHz
<b>Bandwidth[BW]</b>	± 50.0MHz
<b>Insertion Loss in BW</b>	2.0 dB max.
<b>Ripple in BW</b>	1.5 dB max.
<b>VSWR in BW</b>	1.38:1max.
<b>Attenuation [Absolute Value]</b>	54.0 min. @ 0~2700 MHz      40.0 min. @ 2700~3395 MHz 40.0 min. @ 3705~5925 MHz    22.0 min. @ 5925~17000MHz
<b>In/Out Impedance</b>	50Ω
<b>Input Power</b>	3 w max.
<b>Operation Temperature</b>	-40°C ~ +85 °C

**Dimension (mm)**

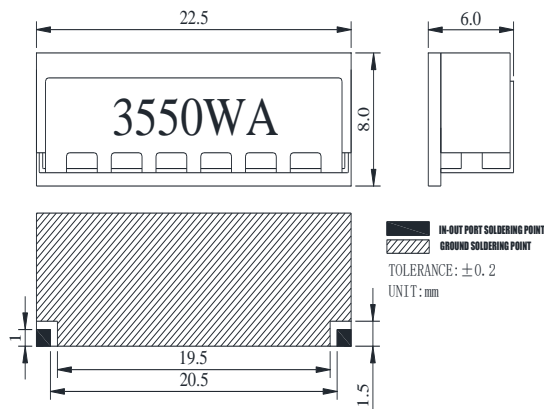

**TEST GRAPH**

