


Product**DFN3475W350GA**

Specification

Center Frequency[fo]	3475MHz	
Bandwidth[BW]	±175MHz	
Insertion Loss in BW	2.0 dB max.	
Ripple in BW	1.3 dB max.	
VSWR in BW	1.52:1max.	
Attenuation [Absolute Value]	45.0 min. @ 1~2700 MHz 20.0 min. @ 2900~3240 MHz 25.0 min. @ 4100~4800 MHz 22.0 min. @ 4900~5950 MHz	40.0 min. @ 2700~2900 MHz 20.0 min. @ 3710~4100 MHz 25.0 min. @ 4800~4900 MHz
In/Out Impedance	50Ω	
Input Power	2 w max.	
Operation Temperature	-40°C ~ +95 °C	

Dimension (mm)

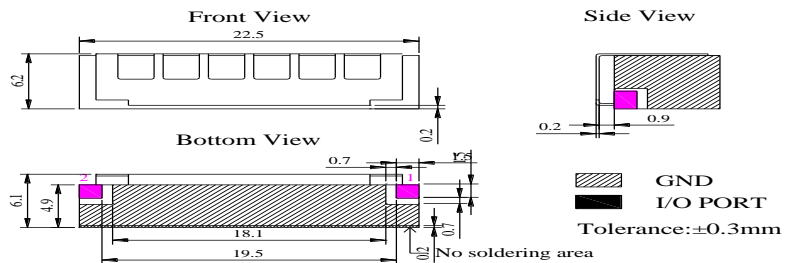

NUMBER	NAME	DESCRIPTION
1	I/O Port 1	Input/Output
2	I/O Port 2	Input/Output
3	GND	Ground

TEST GRAPH

