


Product **DFM4850W100GE**

Specification

Center Frequency[fo]	4850MHz
Bandwidth[BW]	± 50.0MHz
Insertion Loss in BW	2.8 dB max.
Ripple in BW	1.3 dB max.
VSWR in BW	1.5:1max.
Attenuation [Absolute Value]	20.0 min. @ 1~4640 MHz 15.0 min. @ 4640~4775 MHz 15.0 min. @ 4925~5060 MHz 20.0 min. @ 5060~6000 MHz
In/Out Impedance	50Ω
Input Power	2 w max.
Operation Temperature	-40°C ~ +85 °C

Dimension (mm)

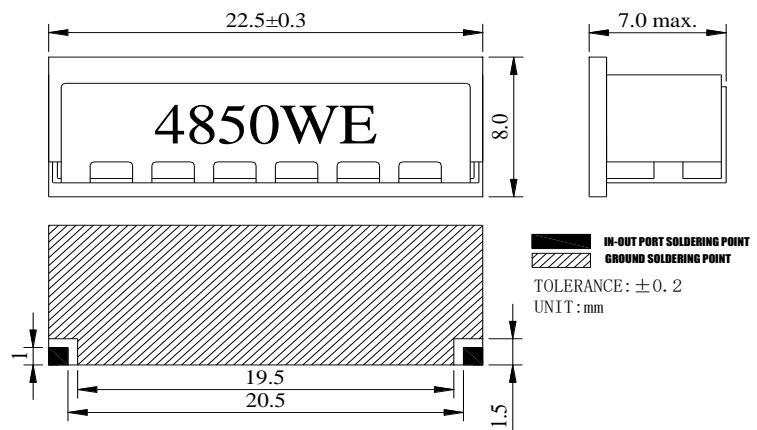

TEST GRAPH

