


**Product****DFN6525X1200EA**

**Specification**

<b>Center Frequency[fo]</b>	6525MHz
<b>Bandwidth[BW]</b>	± 600MHz
<b>Insertion Loss in BW</b>	4.5 dB max. (5925~5945MHz) 3.0 dB max. (5945~7125MHz)
<b>Ripple in BW</b>	3.5 dB max
<b>VSWR in BW</b>	2.0:1max.
<b>Attenuation [Absolute Value]</b>	50 min. @ 5170~5640 MHz 45 min. @ 5640~5835 MHz
<b>In/Out Impedance</b>	50Ω
<b>Input Power</b>	1 w max.
<b>Operation Temperature</b>	-40°C ~ +100 °C

**Dimension (mm)**

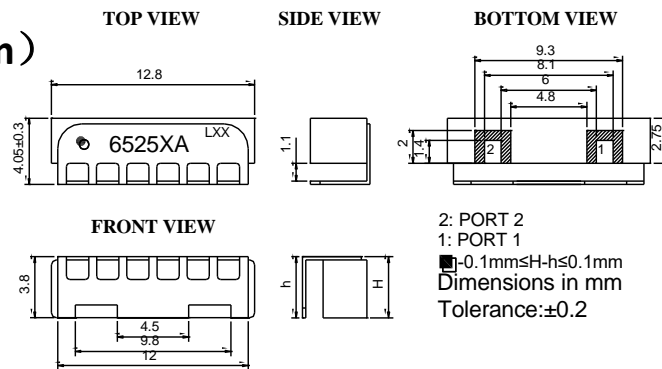

**TEST GRAPH**

