


Product

DFN5492X685EC

Specification

Center Frequency[fo]	5492.5MHz
Bandwidth[BW]	± 342.5MHz
Insertion Loss in BW	3.0 dB max.
Ripple in BW	1.5 dB max
VSWR in BW	2.0:1max.
Attenuation [Absolute Value]	48 min. @ 5935~7125 MHz
In/Out Impedance	50Ω
Input Power	1 w max.
Operation Temperature	-40°C ~ +85 °C

Dimension (mm)

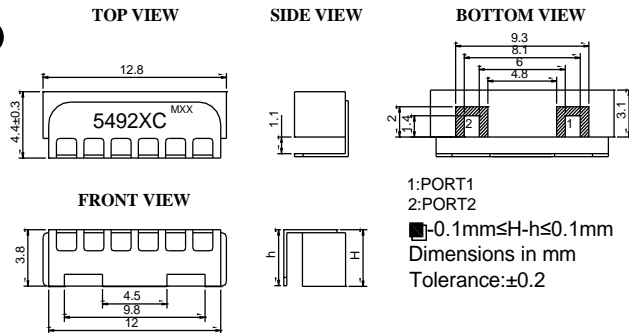

TEST GRAPH

