


Product **DFN5522Y745CA**

Specification

Center Frequency[fo]	5522.5MHz
Bandwidth[BW]	± 372.5MHz
Insertion Loss in BW	1.5 typ. 2.0 dB max. (5150~5815MHz) 2.5 typ. 3.0 dB max. (5815~5895MHz)
Ripple in BW	1.7 dB max./2.0 dB max.
VSWR in BW	2.1:1max.
Attenuation [Absolute Value]	35 min. @ 4900MHz 20 min. @ 5000MHz 40 min. @ 5985~6095MHz 50 min. @ 6095~7125MHz
In/Out Impedance	50Ω
Input Power	1 w max.
Operation Temperature	-40°C ~ +85 °C

Dimension (mm)

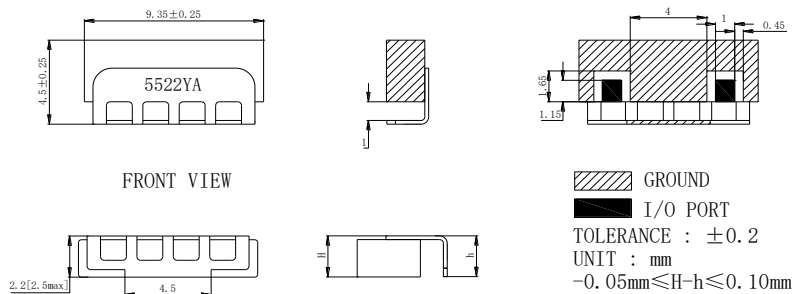

TEST GRAPH

