


Product**DFN6532Y1185CA**

Specification

Center Frequency[fo]	6532MHz
Bandwidth[BW]	$\pm 592.5\text{MHz}$
Insertion Loss in BW	3.0 dB max. (5940~5960MHz) 2.5 dB max. (5960~7125MHz)
Ripple in BW	2.5 dB max
VSWR in BW	2.1:1max.
Attenuation [Absolute Value]	45 min. @ 5640~5850 MHz 50 min. @ 0~5640 MHz
In/Out Impedance	50Ω
Input Power	1 w max.
Operation Temperature	$-40^{\circ}\text{C} \sim +100^{\circ}\text{C}$

Dimension (mm)

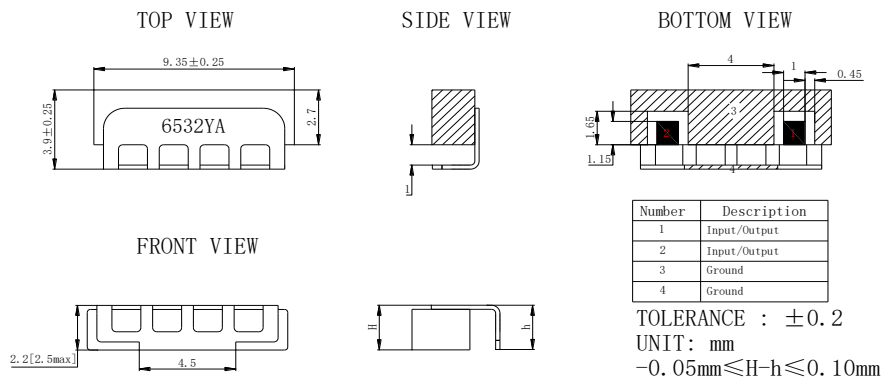

TEST GRAPH

