


Product **DFN1587R56EA**

Specification

Center Frequency[fo]	1587MHz
Bandwidth[BW]	±28.0MHz
Insertion Loss in BW	0.8 dB max.
Ripple in BW	0.4 dB max.
VSWR in BW	1.5:1max.
Attenuation [Absolute Value]	11.0 min. @ 1487 MHz 9.0 min. @ 1687 MHz 35.0 min. @ 1387 MHz 22.0 min. @ 1787 MHz
In/Out Impedance	50Ω
Input Power	1 w max.
Operation Temperature	-40°C ~ +85 °C

Dimension (mm)

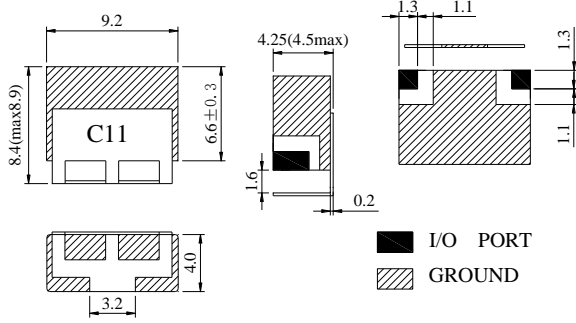

TOLERANCE: ±0.20
UNIT: mm

TEST GRAPH

