


Product **DFN1585P80EA**

Specification

Center Frequency[fo]	1585MHz
Bandwidth[BW]	±40MHz
Insertion Loss in BW	0.7 dB max.
Ripple in BW	0.5 dB max.
VSWR in BW	1.5:1max.
Attenuation [Absolute Value]	4.0 min. @ 1435 MHz 4.0 min. @ 1735 MHz 20.0 min. @ 1985 MHz 25.0 min. @ 1185 MHz 25.0 min. @ 2492 MHz
In/Out Impedance	50Ω
Input Power	1 w max.
Operation Temperature	-40°C ~ +85 °C

Dimension (mm)

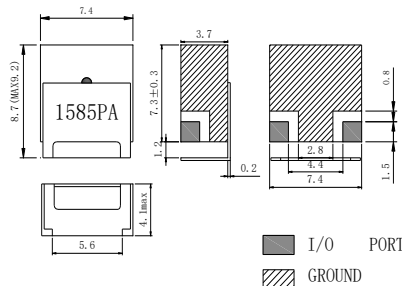

TOLERANCE: ±0.20
UNIT: mm

TEST GRAPH

