


Product

DFC2492P40A14

Specification

Center Frequency[fo]	2492MHz
Bandwidth[BW]	± 20.0MHz
Insertion Loss in BW	0.6 dB max.
Ripple in BW	0.5 dB max.
VSWR in BW	1.5:1max.
Attenuation [Absolute Value]	35.0 min. @ 1616 MHz
In/Out Impedance	50Ω
Input Power	1 w max.
Operation Temperature	-55°C ~ +85 °C

Dimension (mm)

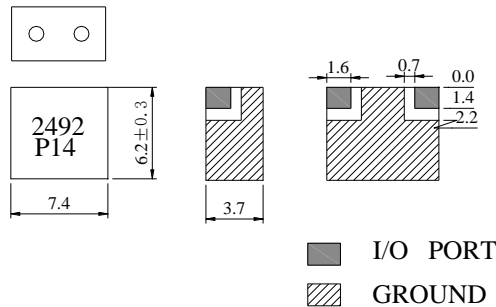

TOLERANCE: ±0.20 UNIT: mm

TEST GRAPH

