


Product **DFC1268P24A4**

Specification

Center Frequency[fo]	1268MHz
Bandwidth[BW]	± 12.0MHz
Insertion Loss in BW	0.55 dB max.
Ripple in BW	0.1 dB max.
VSWR in BW	1.4:1max.
Attenuation [Absolute Value]	10.0 min. @ 1175.42 MHz 40.0 min. @ 1611~1621 MHz
In/Out Impedance	50Ω
Input Power	2 w max.
Operation Temperature	-40°C ~ +85 °C

Dimension (mm)

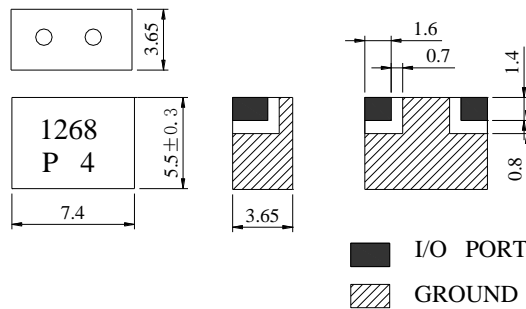

TOLERANCE: ±0.20
UNIT: mm

TEST GRAPH

