

Product

DM4A1900F6G2471PA


Specification

ITEM	CH1	CH2	CH3
Center Frequency[fo]	1900MHz	2350MHz	2593MHz
Bandwidth[BW]	±20MHz	±50MHz	±97MHz
Insertion Loss in BW	2.5 dB max.	2.5 dB max.	2.5 dB max.
Ripple in BW	1.0 dB max.	1.5 dB max.	1.0 dB max.
VSWR in BW	16.0 dB min	16.0 dB min	12.0 dB min
Attenuation [Absolute Value]	45@2300~2400MHz 45@2496~2690MHz	40@1880~1920MHz 40@2496~2690MHz	40@1880~1920MHz 40@2300~2400MHz
In/Out Impedance	50Ω		
Input Power	3 w max.		
Operation Temperature	-40°C ~ +85 °C		

Product

DM4A1900F6G2471PA

Dimension (mm)

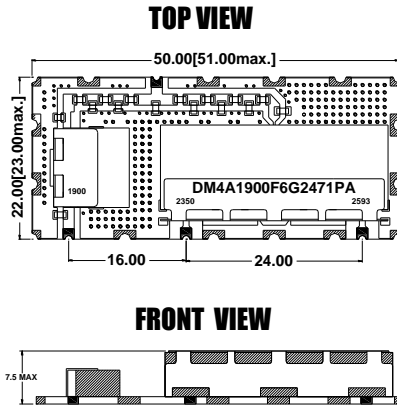

I/O PORT
 GROUND
 TOLERANCE : ±0.20
 UNIT : mm

TEST GRAPH

