

Product

DM6G1795F6G925PB


Specification

ITEM	CH1	CH2	CH3	CH4
Center Frequency[fo]	1747.5MHz	1842.5MHz	902.5MHz	947.5MHz
Bandwidth[BW]	±37.5MHz	±37.5MHz	±12.5MHz	±12.5MHz
Insertion Loss in BW	5.0 dB max.	5.0 dB max.	3.5 dB max.	3.5 dB max.
Ripple in BW	3.0 dB max.	3.0 dB max.	2.0 dB max.	2.0 dB max.
VSWR in BW	15.0 dB min	15.0 dB min	15.0 dB min	15.0 dB min
Attenuation [Absolute Value]	45@1805~1880MHz 55@890~915MHz 55@935~960MHz	45@1710~1785MHz 55@890~915MHz 55@935~960MHz	50@935~960MHz 55@1710~1785MHz 55@1805~1880MHz	50@890~915MHz 55@1710~1785MHz 55@1805~1880MHz
In/Out Impedance	50Ω			
Input Power	3 w max.			
Operation Temperature	-40°C ~ +85 °C			

Product

DM6G1795F6G925PB

Dimension (mm)

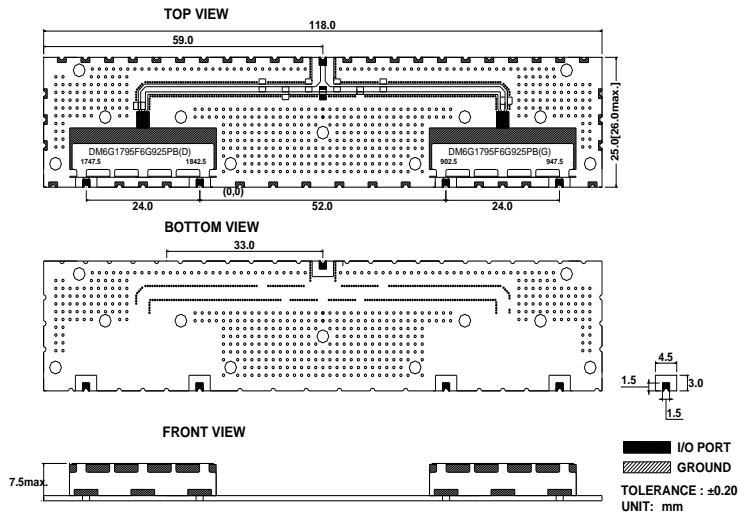

TEST GRAPH

