

Product

DM6G2045F6G1810PB


Specification

ITEM	CH1	CH2	CH3	CH4
Center Frequency[fo]	1950MHz	2140MHz	1857.5MHz	1762.5MHz
Bandwidth[BW]	±30MHz	±30MHz	±22.5MHz	±22.5MHz
Insertion Loss in BW	2.8 dB max.	2.8 dB max.	2.8 dB max.	2.8 dB max.
Ripple in BW	1.5 dB max.	1.5 dB max.	1.5 dB max.	1.5 dB max.
VSWR in BW	15.0 dB min	15.0 dB min	15.0 dB min	15.0 dB min
Attenuation [Absolute Value]	40@1740~1785MHz 40@1835~1880MHz 50@2110~2170MHz	45@1740~1785MHz 45@1835~1880MHz 50@1920~1980MHz	55@1740~1785MHz 40@1920~1980MHz 40@2110~2170MHz	50@1835~1880MHz 45@1920~1980MHz 45@2110~2170MHz
In/Out Impedance	50Ω			
Input Power	3 w max.			
Operation Temperature	-40°C ~ +85 °C			

Product

DM6G2045F6G1810PB

Dimension (mm)

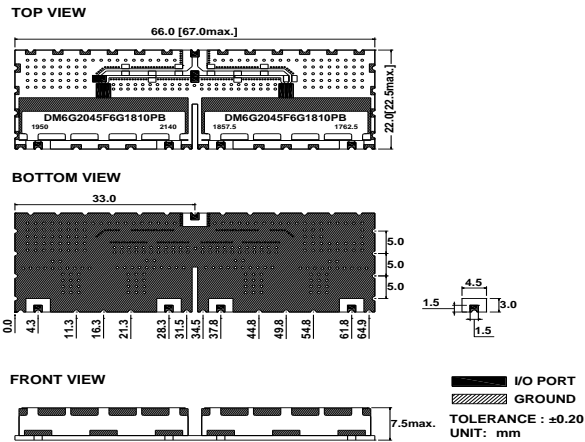

TEST GRAPH

