

Product

DM3A1417D4G2090PA


Specification

ITEM	CH1	CH2	CH3
Center Frequency[fo]	1417.135MHz	2185MHz	1995MHz
Bandwidth[BW]	±158.865MHz	±15MHz	±15MHz
Insertion Loss in BW	5.0 dB max.	3.0 dB max.	3.0 dB max.
Ripple in BW	1.5 dB max.	1.0 dB max.	1.5 dB max.
VSWR in BW	2.0:1max	1.5:1max.	1.5:1max.
Attenuation [Absolute Value]	45@2170~2200MHz 45@1980~2010MHz	40@1258.27~1576MHz 40@1980~2010MHz	40@1258.27~1576MHz 40@2170~2200MHz
In/Out Impedance	50Ω		
Input Power	2 w max.		
Operation Temperature	-40°C ~ +85 °C		

Product

DM3A1417D4G2090PA

Dimension (mm)

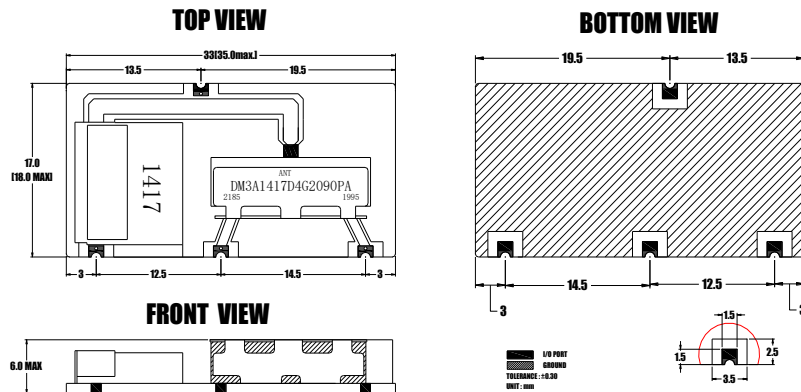

TEST GRAPH

