



Product

LA31H2450 5500-A33


Specification

Frequency Range	2400MHz~2500MHz/5150 MHz~5850MHz
V.S.W.R	≤ 2.0
Impedance	50 Ω
Gain	2.23dBi/4.05dBi
Azimuth	Omni-directional
Polarization	Linear
Impedance	50 Ω
Azimuth Beam width	Omni-directional

Dimension (mm)

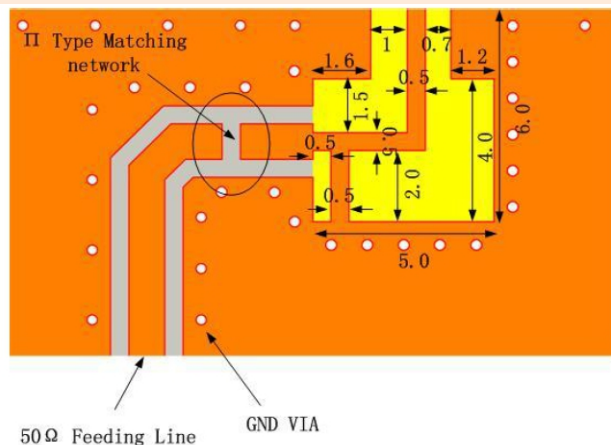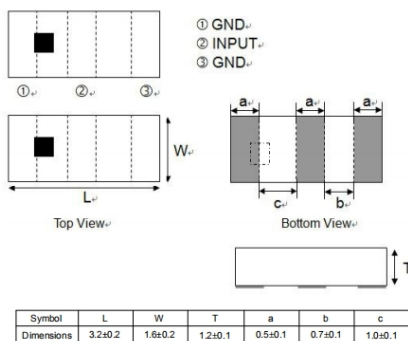

Performance

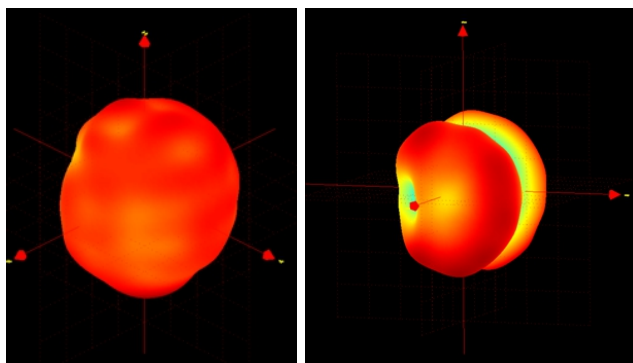

2450MHz

5500MHz

Test Graph

