


Product

LA1204H433-A34


Specification

Frequency Range	428MHz~438MHz
Return Loss	≥ 6.5dB
Impedance	50Ω
Gain	- 1.72dBi
Azimuth	Omni-directional
Polarization	Linear
Impedance	50 Ω
Azimuth Beam width	Omni-directional

Dimension (mm)

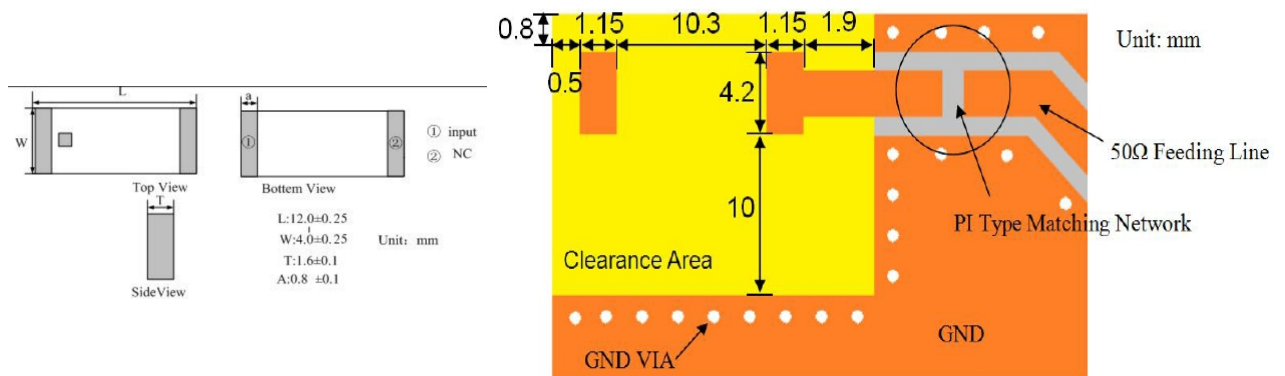

Performance

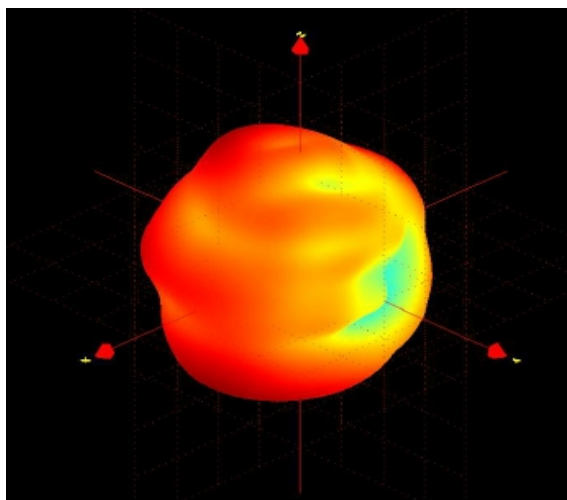

Test Graph

