


Product**LA31P2450-A49**

Specification

Frequency Range	2400MHz~2500MHz
V.S.W.R (in BW)	≤2.0
Impedance	50Ω
Gain	4.10 dBi
Azimuth	Omni-directional
Polarization	Linear
Impedance	50 Ω
Azimuth Beam width	Omni-directional

Dimension (mm)

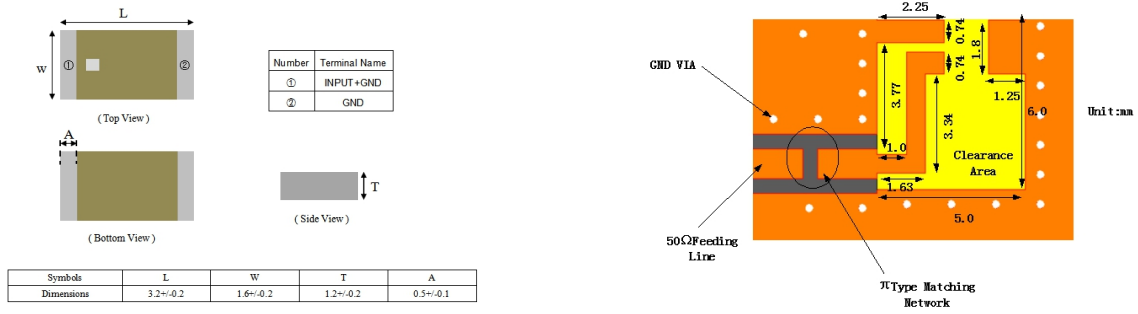

Performance

Test Graph

