


Product: **LF18L2170H107-L72/M**

Specification

Center Frequency	2025MHz
Insertion Loss	$\leq 0.6\text{dB} / \leq 1.5\text{dB}$
Band Width	1880~2170MHz
V.S.W.R (in BW)	≤ 2.0
Attenuation	$\geq 18\text{dB}$ (2400~2500MHz) $\geq 20\text{dB}$ (3760~4050MHz) $\geq 12\text{dB}$ (5150~5850MHz) $\geq 12\text{dB}$ (5640~6075MHz) $\geq 5\text{dB}$ (7520~8100MHz)
In/Output Impedance	50 Ω

Dimension (mm)

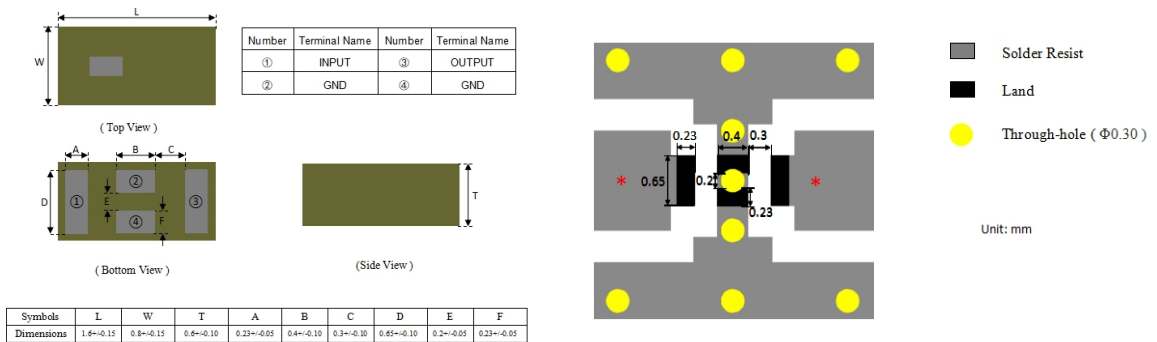

Test Graph

