


Product:

LF18L2690H98-L134

Specification

Center Frequency	2200MHz
Insertion Loss	≤0.35 dB/≤0.50 dB
Band Width	1710～2690MHz
Return Loss	≥15 dB
Attenuation	≥5dB (@3296～3339MHz) ≥17dB (@3420～3570MHz) ≥12dB (@3700～3820MHz) ≥16dB (@3840～3960MHz) ≥14dB (@4120～4245MHz) ≥14dB (@4400～4574MHz) ≥21dB (@4944～5094MHz) ≥30dB (@5130～5335MHz) ≥30dB (@5550～5730MHz) ≥30dB(@5760～5845MHz) ≥17dB (@5846～5940MHz) ≥4dB (@6160～6405MHz) 10dB typ. (@6590～8250MHz)
In/Output Impedance	50 Ω

Dimension（mm）

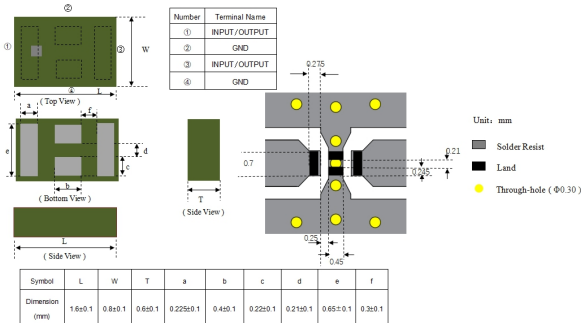

Test Graph

