


Product: LF18B2450P57-N174/K

Specification

Center Frequency	2450 MHz
Insertion Loss	≤1.7dB
Band Width	2400~2500 MHz
VSWR in BW	≤2.0
Attenuation	≥30dB (880~915MHz) ≥30dB (1710~1785MHz) ≥25dB (1850~1910MHz) ≥25dB (4800~5000MHz) ≥15dB (7200~7500MHz)
Input Power (MAX)	0.5 W
In/Output Impedance	50 Ω

Dimension (mm)

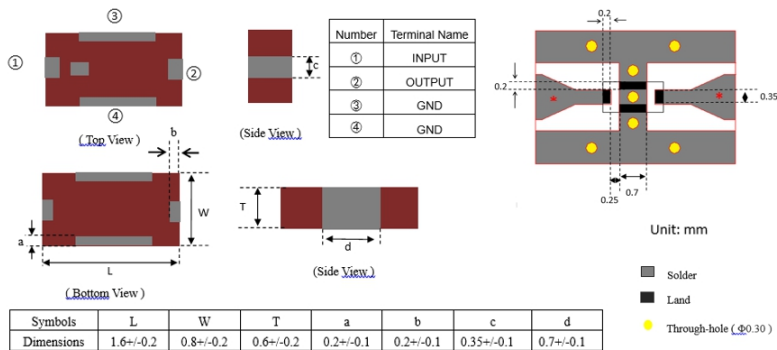

Test Graph

