


Product: **LF18B2450P57-N174/T**

Specification

Center Frequency	2450 MHz
Insertion Loss	≤1.7dB
Band Width	2400~2500 MHz
VSWR in BW	≤2.0
Attenuation	≥25 dB (4880~5400MHz) ≥25 dB (7200~8100MHz)
Input Power (MAX)	0.5 W
In/Output Impedance	50 Ω

Dimension (mm)

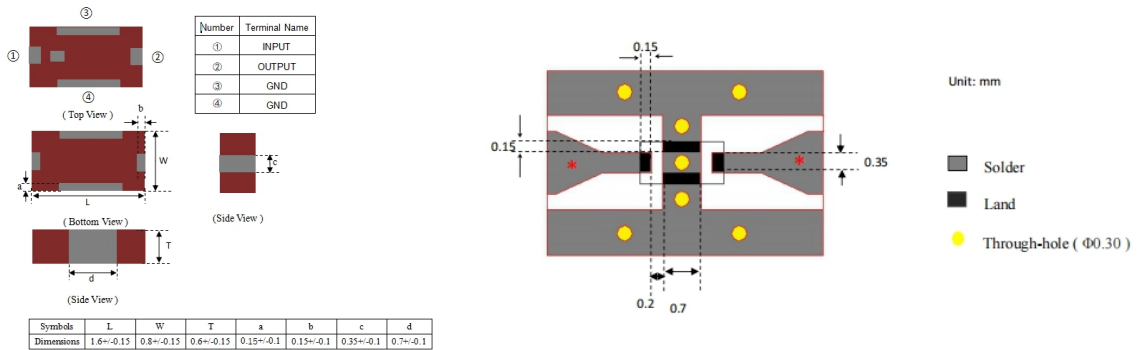

Test Graph

