


Product: LF21B4450H86-N253

Specification

Center Frequency	4700 MHz
Insertion Loss	$\leq 2.0\text{dB}/\leq 1.6\text{dB}/\leq 2.0\text{dB}$
Band Width	4400~5000 MHz
VSWR in BW	≤ 2.0
Attenuation	$\geq 37\text{dB}$ (450~2200Mhz) $\geq 37\text{dB}$ (2300~2483Mhz) $\geq 33\text{dB}$ (2496~2690Mhz) $\geq 15\text{dB}$ (5490~5670Mhz) $\geq 25\text{dB}$ (5670~5950Mhz) $\geq 25\text{dB}$ (6200~8000Mhz) $\geq 22\text{dB}$ (8800~10000Mhz) $\geq 10\text{dB}$ (13200~15000Mhz) $\geq 10\text{dB}$ (17600~20000Mhz)
In/Out Impedance	50Ω
Input Power (MAX)	32dBm

Dimension (mm)

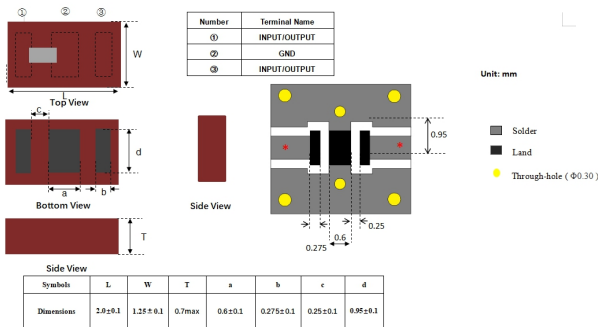

Test Graph

