


Product: LF18B1915H1008-N257

Specification

| | |
|----------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Center Frequency | 1915 MHz |
| Insertion Loss | ≤2.3 dB |
| Band Width | 1805~2025 MHz |
| VSWR in BW | ≤2.0 |
| Attenuation | ≥30 dB (at 700~950 MHz) ≥15dB (at 950~1050 MHz) ≥25 dB (at 2400~2500 MHz) ≥30 dB (at 2700~5150 MHz) ≥35 dB (at 5150~5850 MHz) ≥30 dB (at 5850~12750 MHz) |
| Input Power (MAX) | 3 W |
| In/Output Impedance | 50 Ω |

Dimension (mm)

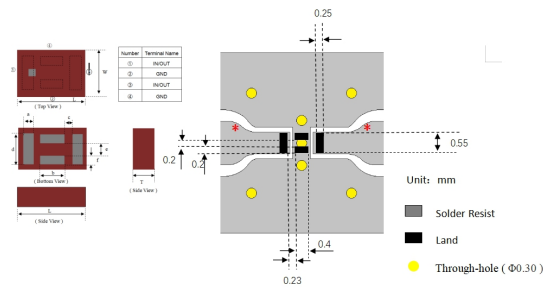

| Symbol | L | W | T | a | b | c | d | e | f |
|----------------|--------------|--------------|--------------|---------------|---------------|---------------|---------------|---------------|---------------|
| Dimension (mm) | 1.6± 0.10 | 0.8± 0.10 | 0.7± 0.10 | 0.25± 0.10 | 0.40± 0.10 | 0.23± 0.10 | 0.55± 0.10 | 0.21± 0.10 | 0.20± 0.10 |

Test Graph

