


Product: LD18D2450LAN-D30/M

Specification

Frequency Range	2400~2500MHz/ 4900~5950 MHzMHz
Insertion Loss	≤0.6dB/ ≤0.8dB
V.S.W.R (in BW)	≤1.8/≤1.8
Attenuation(Lower Band)	≥25dB (4800~5000 MHz) ≥20dB (7200~7500 MHz)
Attenuation(Higher Band)	≥30dB (2400~2500 MHz) ≥15dB (9800~11900 MHz)
In/Output Impedance	50Ω/50Ω
Isolation	≥25dB (2400~2500 MHz) ≥23dB (4900~5950 MHz)

Dimension (mm)

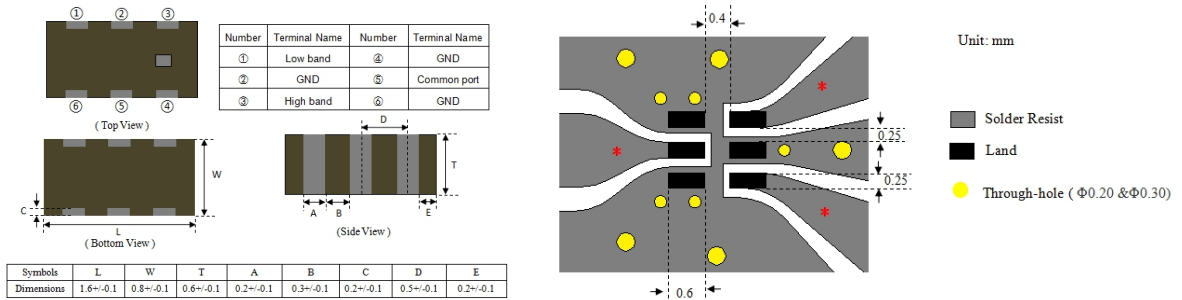

Test Graph

