



Product:

LD21D2450LAN-D31/MH

Specification

Frequency Range	2400~2500MHz/ 5150~5850 MHzMHz
Insertion Loss	≤0.4dB/ ≤0.45dB
Return Loss (in BW)	≥10dB/≥10dB
Attenuation(Lower Band)	≥23dB (4800~5000 MHz) ≥20dB (7200~7500 MHz)
Attenuation(Higher Band)	≥25dB (2400~2500 MHz) ≥20dB (10300~11700 MHz) ≥12dB (15450~17550 MHz)
In/Output Impedance	50Ω/50Ω
Isolation	≥20dB (2400~2500 MHz) ≥20dB (5150~5850 MHz)

Dimension (mm)

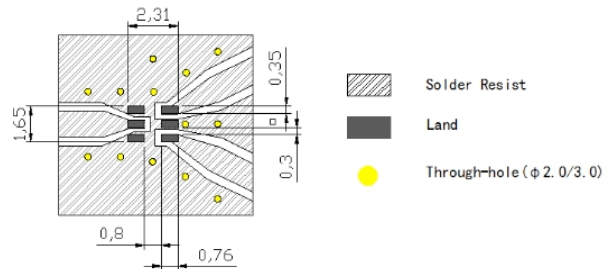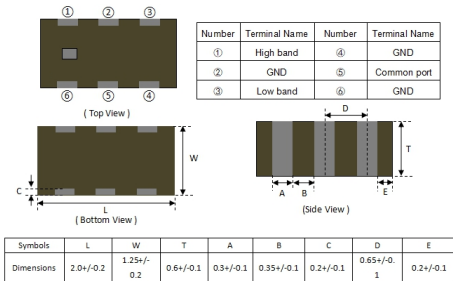

Test Graph

