


Product: LD18D2450LAN-D33/T

Specification

Frequency Range	2400~2500MHz/ 5150~5850 MHzMHz
Insertion Loss	≤0.75dB/ ≤1.7dB
V.S.W.R (in BW)	≤2.0/≤2.0
Attenuation(Lower Band)	≥23dB (4800~5000 MHz) ≥26dB (7200~7500 MHz)
Attenuation(Higher Band)	≥25dB (2400~2500 MHz) ≥15dB (3400~3600 MHz) ≥10dB (3600~3900 MHz) ≥17dB (6900~7550 MHz) ≥25dB (10600~11700 MHz) ≥18dB (15300~16200 MHz)
In/Output Impedance	50Ω/50Ω

Dimension (mm)

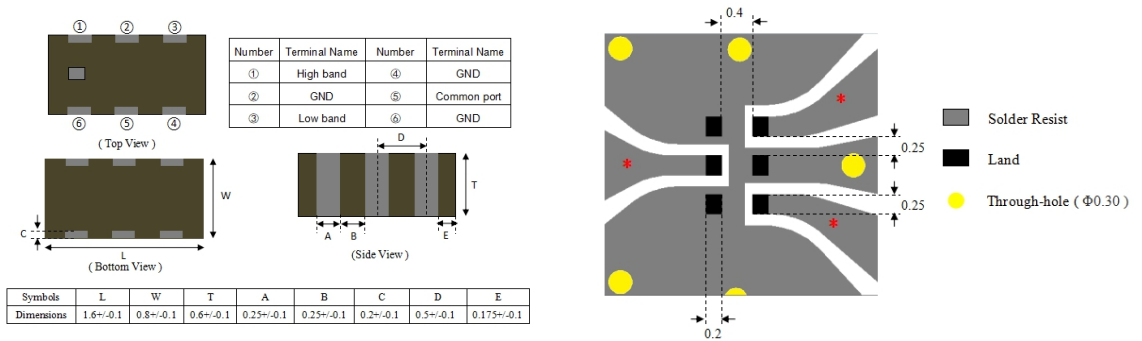

Test Graph

