


Product: LD18D2450LAN-D40/M

Specification

| | |
|----------------------------------|---|
| Frequency Range | 2400~2500MHz/4900~5950MHz |
| Insertion Loss | ≤0.9dB/≤1.1 dB |
| Return Loss | ≥13 dB/≥13 dB |
| Attenuation (Lower Band) | ≥17dB (700~1300MHz) ≥25dB (4800~5000MHz) ≥27dB (7200~7500MHz) |
| Attenuation (Higher Band) | ≥25dB (1200~1500MHz) ≥26dB (1600~2000MHz) ≥25dB (2300~3000MHz) ≥28dB (10000~12000MHz) ≥20dB (15000~16500MHz) ≥10dB (16500~18000MHz) |
| In/Output Impedance | 50Ω/50Ω |

Dimension (mm)

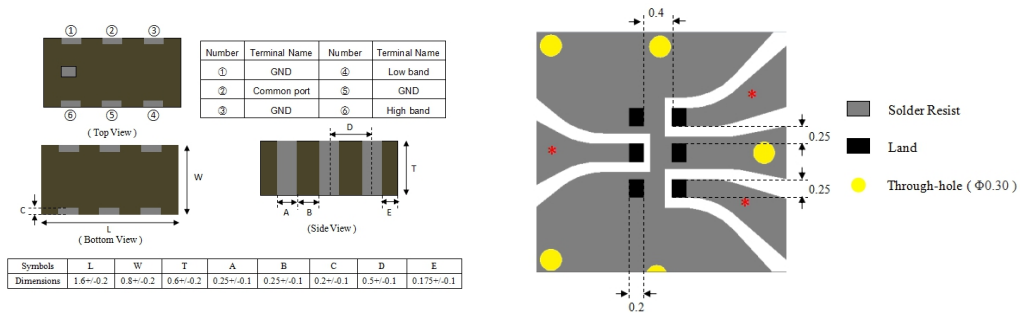

Test Graph

