


Product: LD18D2450LAN-D41/M

Specification

Frequency Range	2400~2500MHz/5150~5850MHz
Insertion Loss	≤0.5dB / ≤0.7dB
Return Loss	≥15 dB/≥15 dB
Attenuation(Lower Band)	≥27 dB (4800~5000MHz) ≥27 dB (7200~7500MHz)
Attenuation(Higher Band)	≥27 dB (2400~2500MHz) ≥27 dB (10300~11700MHz) ≥27 dB (15450~16200MHz)
In/Output Impedance	50Ω/50Ω
Isolation	≥32dB (2400~2500 MHz) ≥26dB (5150~5850 MHz)

Dimension (mm)

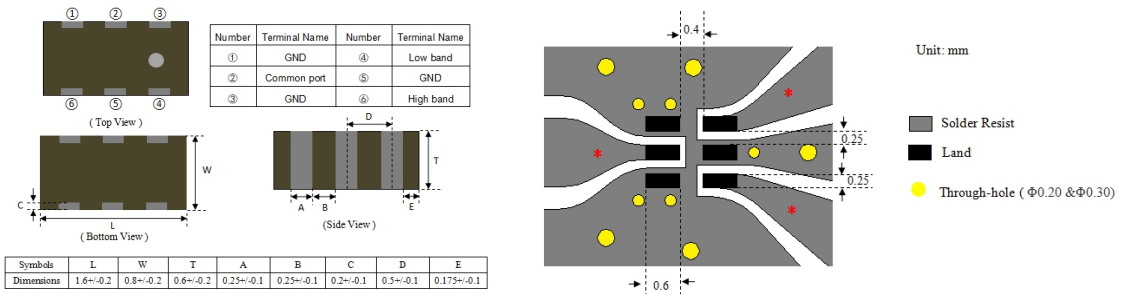

Test Graph

