


Product:

LD22L1653H4625-D50

Specification

Frequency Range	617~2690MHz/3300~5925MHz
Insertion Loss	≤ 0.4 dB/≤ 0.65dB/≤ 1.4 dB/≤ 0.6 dB
Return Loss	≥ 14 dB/≥ 12 dB/≥ 9.6 dB/≥ 9.6 dB
Attenuation (Lower Band)	≥ 15 dB (3300~3400MHz) ≥ 23 dB (3400~3800MHz) ≥ 28 dB (5150~5925MHz)
Attenuation (Higher Band)	≥ 30 dB (617~960MHz) ≥ 27 dB (1427~1511MHz) ≥ 23 dB (1710~2690MHz) ≥ 15 dB (10300~11700MHz) ≥ 5 dB (15450~17550MHz)
In/Output Impedance	50Ω/50Ω
Isolation	≥ 30 dB (617~960MHz) ≥ 27dB (1427~1661MHz) ≥ 23 dB (1710~2690MHz) ≥ 15 dB (3300~3400MHz) ≥ 23 dB (3400~3800MHz) ≥ 28 dB (5150~5925MHz)

Dimension (mm)

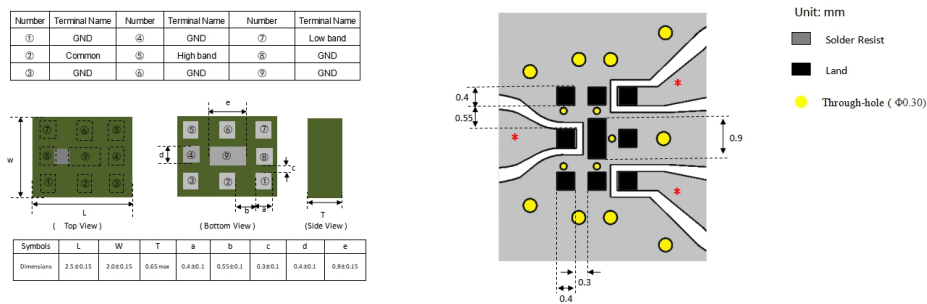

Test Graph

