


Product: LD18D2450LAN-D86

Specification

Frequency Range	2400~2500MHz/4900~6000MHz
Insertion Loss	≤0.85dB/≤0.85 dB
Return Loss	≥15 dB/≥15 dB
Attenuation (Lower Band)	≥20 dB (700~1300MHz) ≥30 dB (4800~5000MHz) ≥30 dB (7200~7500MHz)
Attenuation (Higher Band)	≥27 dB (1200~1500MHz) ≥26 dB (1600~2000MHz) ≥25 dB (2300~3000MHz) ≥28 dB (10000~11800MHz) ≥13 dB (15000~17700MHz)
In/Output Impedance	50Ω/50Ω
Isolation	≥30 dB (2400~2500 MHz) ≥30 dB (4900~5950 MHz)

Dimension (mm)

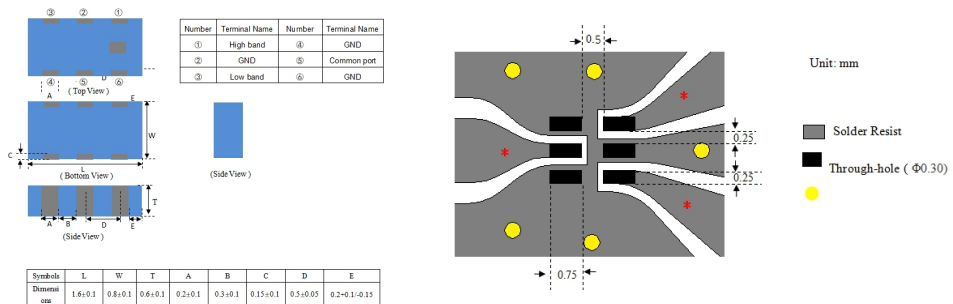

Test Graph

