


**Product: LD18D2450LAN-D87/T**

**Specification**

<b>Frequency Range</b>	2400~2500MHz/5150~7130MHz	
<b>Insertion Loss</b>	≤0.7dB/≤1.2 dB/≤1.1 dB	
<b>V.S.W.R</b>	≤1.5/≤1.58	
<b>Attenuation (Lower Band)</b>	≥25 dB (4800~5000MHz) ≥25 dB (5150~7125MHz) ≥25 dB (7200~7500MHz)	
<b>Attenuation (Higher Band)</b>	≥25 dB (2400~2500MHz)    ≥22 dB (2515~3600MHz) ≥5 dB (3800~4200MHz)    ≥23dB (10300~14250MHz) ≥18dB (15450~21375MHz)	
<b>In/Output Impedance</b>	50Ω/50Ω	

**Dimension (mm)**

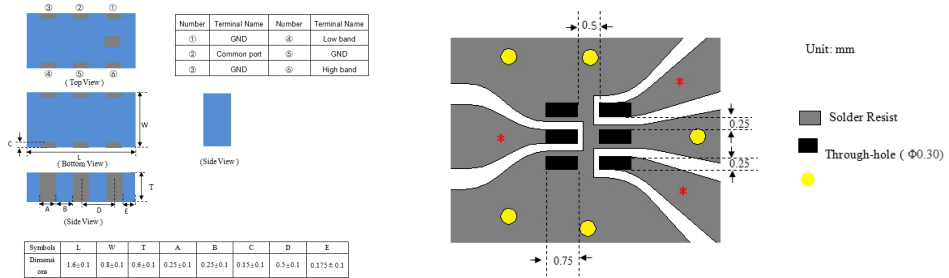

**Test Graph**

