


Product: LD18D2450LAN-D91

Specification

| | |
|---------------------------------|--|
| Frequency Range | 2400~2500MHz/4900~5950MHz |
| Insertion Loss | ≤0.75dB/≤1.5 dB/≤1.2dB |
| Return Loss | ≥13 dB/≥13 dB |
| Attenuation(Lower Band) | ≥10dB (1200~1250MHz) ≥10dB (1570~1600MHz) ≥25dB (4800~6000MHz) ≥25dB (7200~7500MHz) ≥25dB (9600~10000MHz) |
| Attenuation(Higher Band) | ≥25 dB (1610~2000 MHz) ≥27 dB (2400~3000 MHz) ≥30 dB (3300~3800MHz) ≥20 dB (9800~12000MHz) ≥20 dB (14200~18000MHz) |
| In/Output Impedance | 50Ω/50Ω |
| Isolation | ≥30 dB (2400~2500 MHz) ≥25 dB (4800~6000 MHz) ≥20 dB (15000~18000MHz) |

Dimension (mm)

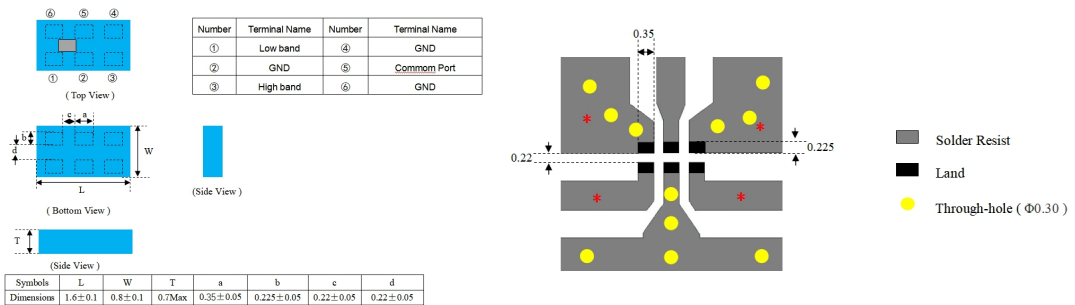

Test Graph

