


**Product: LT21L15M24H55-T08/M**

**Specification**

<b>Frequency Range</b>	1560~1610MHz/2400~2500MHz/4900~5950MHz
<b>Insertion Loss</b>	0.6 dB max/0.73dB max/0.8dB max
<b>Return Loss(dB)</b>	10 min
<b>Attenuation(dB) (1560~1610MHz)</b>	14 min. @ 2400 ~2500MHz 15 min. @ 4800~6000 MHz
<b>Attenuation(dB) (2400~2500MHz)</b>	10 min.@ 3600~3750 MHz    20 min.@ 4800~5000 MHz 10 min.@ 7200~7500 MHz    10 min. @ 9600~10000 MHz
<b>Attenuation(dB) (4900~5950MHz)</b>	24 min. @ 860 ~ 960 MHz    24 min. @ 1545 ~ 1605 MHz 25 min. @ 1710 ~ 1990 MH    30 min. @ 2170 MHz 10 min. @ 8100 ~ 8800 MHz    15 min. @ 8820 ~ 9800 MHz 25 min. @ 9800 ~ 11800 MHz
<b>In/Output Impedance</b>	50Ω/50Ω
<b>Isolation(dB)</b>	Low to Middle band @ 1559~1606    20 min. Middle to High band @ 4800~5000    20 min. Low to High band @ 1559~1606    25 min.

**Dimension (mm)**

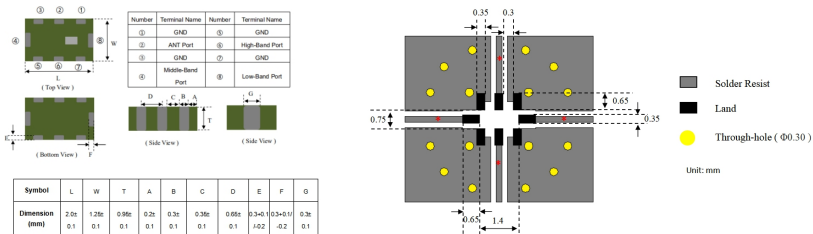

**Test Graph**

